

12 Port Gigabit PoE Hub

Model	nHUB-12P2U (12port POE + 2port UTP)
	nHUB-12P2S (12port POE + 2port SFP)

Standard	
IEEE802.3i	10Base-T, 10Mbit/s
IEEE802.3u	100Base-T, 100Mbit/s
IEEE802.3ab	1000Base-T, Gbit/s
IEEE802.3af	Power over Ethernet (PoE)
IEEE802.3z	1*SFP, Gbit/s

Interface	
Port No.:	10/100/1000Base-TX with POE injector x 12 10/100/1000Base-TX UTP port x 2 or SFP port x 2
Port	DC48V, 300mA (Maximal every port)

Power	
Power Input	90 to 240 VAC, 50/60 Hz (socket)
Power consumption	170W (Full load)

Mechanical	
Enclosure	Aluminum material
Rackmount	19" 1U Standard Rackmount (optional)
Volume	430(L) x 180(W) x 43(H) mm
Weight	2.5kgs


Environment	
Operating Temperature	0 to 50 °C
Operating Humidity	10% to 80% R.H.
Storage temperature	(-)10 to (+) 70 °C
Storage Humidity	5% to 95%

Certification	CE,FCC,RoHS
----------------------	-------------




nHUB-12P2U (12port POE + 2port UTP)
nHUB-12P2S (12port POE + 2port SFP)

Recommended System Configuration

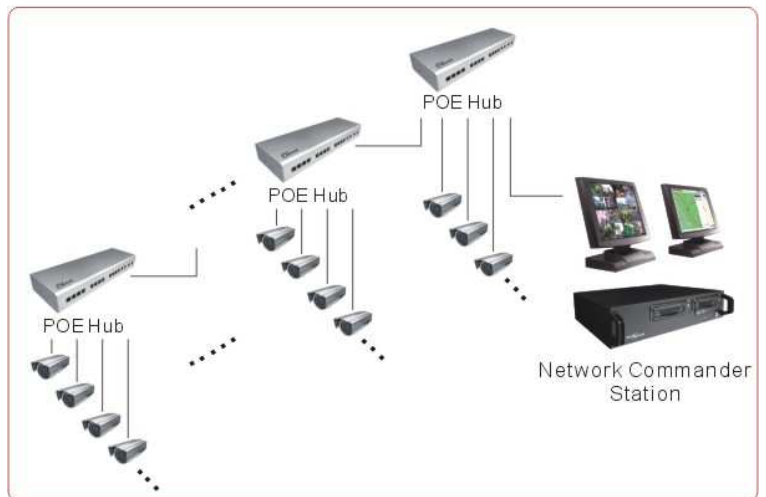

Star Configuration

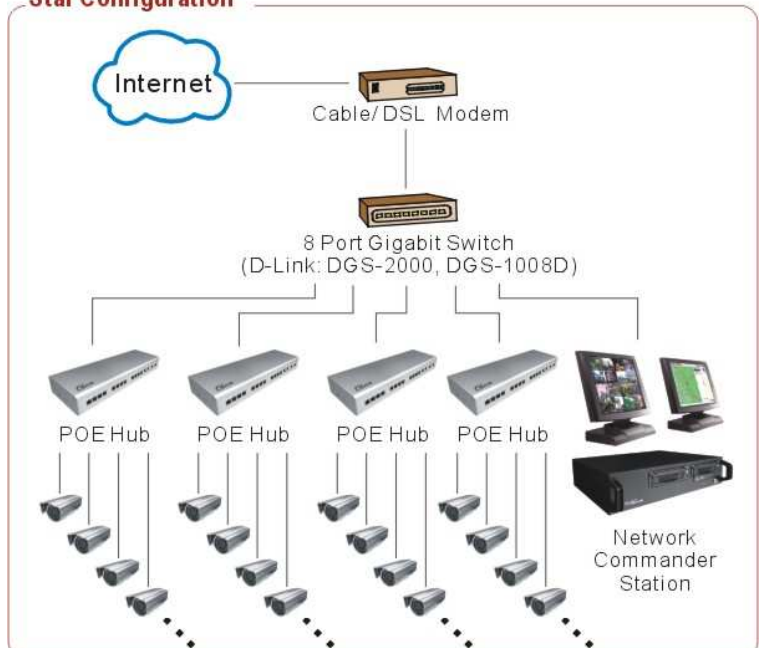

(Specifications subject to change without prior notice)