

4 Port Gigabit PoE Hub



Model number : nHub-4P

Standard:

IEEE802.3i :10Base-T, 10Mbit/s

IEEE802.3u :100Base-T, 100Mbit/s

IEEE802.3ab :1000Base-T, Gbit/s

IEEE802.3af :Power over Ethernet (PoE)

Interface:

Number of Ports :10/100/1000Base-TX with PoE injector
x 4

:10/100/1000Base-TX uplink port x 1

Connectors :10/100/1000TX: RJ-45 x 5

Power Provision : DC48V, 300mA per each port (max.)

Power Requirement:

Power Input : 90 to 240 Vac, 50/60 Hz (socket)

Power Consumption : 55W (full loading)

Mechanical:

Enclosure : Aluminum material

Installation : Wall mount or desktop

Dimension : 188 (L) x 105 (W) x 44 (H) mm

Weight : 580g

Environment:

Operating : 0 to 50°C, 10% to 80% R.H.
(Non-condensing)


Storage : (-)10 to (+) 70°C, 5% to 95%
(non-condensing)

Approvals : CE, LVD, FCC, RoHS




Recommended System Configuration

Cascade Configuration

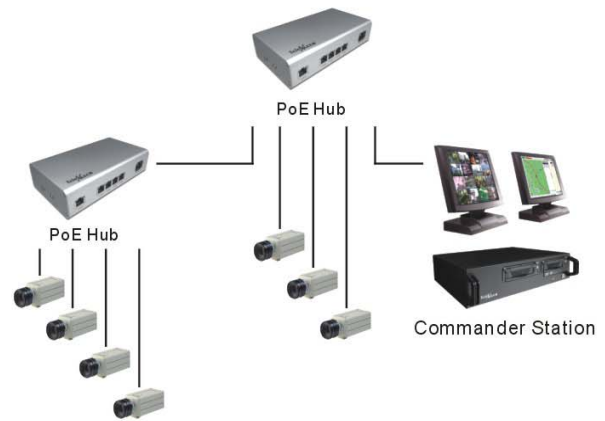

Star Configuration

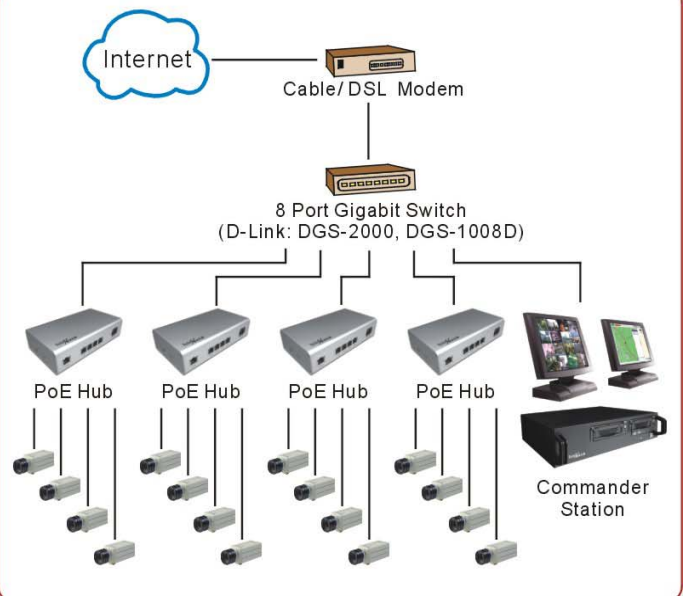

TMSP: Telexper Multiple Stream Protocol

(Specifications subject to change without prior notice)

Telexper International Inc.

33235 Transit Avenue, Union City, CA 94587 USA / Phone: 1-510-477-9150 / Fax: 1-510-477-9634

3F-3, No.2, Jian 8th Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.) / Phone: +886-2-6620-5898 / Fax: +886-2-6620-6909 / <http://www.telexper.com> / E-mail: sales-tw@telexper.com