

Network Commander Station Basic Series



Features:

- Integrate systems of CCTV, Broadcast, TV wall matrix, Control, Alarm, Intercom, Access control, E-Map, Multimedia advertisement and more.
- User-friendly and easy-to-operate GUI.
- H.264 video codec for real-time and clear video
- Embedded Windows 7 OS on built-in 16GB SSD for higher and stable performance.
- Triple-monitor video output (LIVE/Playback/E-Map)
- Video processing, live monitoring, playback, backup and remote viewing.
- 3G Phone Remote Viewer (Windows OS/ iPhone/ Android/ Symbian OS)



nCS-16/32/48

Specifications:


Model No.:	nCS-16	nCS-32	nCS-48
	16ch Commander Station Basic	32ch Commander Station Basic	48ch Commander Station Basic
Electrical:			
Operating System	Windows 7 embedded OS on 16GB SSD		
TCP/IP	Gigabit Port (RJ-45)		
Video Inputs	IPx16	IPx32	IPx48
Audio Recording	IPx16	IPx32	IPx48
Live Display	Real-time video at 16ch display. Max. 64 screen display.		
Rec Rate	480fps@D1	960fps@D1	1,440fps@D1
Playback Rate	Max. 480 fps @ D1	Max. 480 fps @ D1	Max. 480 fps @ D1
Rec. Resolution	320x240 / 360x240 / 640x480 / 720x480 / 1280x720 / 1280x1024 / 1600x1200 / 1920 x 1080		
Picture Quality	High/Normal/Low		
Storage Hard Drive	3.5" SATA type x 4		
Video Backup	Support Mirror Backup (optional)		
Alarm Notifications	Video Loss, Disconnection, HDD, Motions, Sensors, I/O Devices		
PTZ Control	Pelco D, Pelco P, Panasonic, Kalatel, Bosch & etc		
Power Requirements:			
Power Input	90-240 Vac, 50/ 60 Hz		
Power consumption	185W Max. (including HDD)		
Mechanical:			
Enclosure	Metal Material		
Dimension (L x W x H)	430 x 470(445) x 155 mm (LxWxH)		
Weight	9 Kgs		
Environment:			
Operation Temp.	0 to 50 °C, 10% to 80% R.H.		
Storage Temp.	(-)10 to (+) 70 °C, 5% to 95%		
Certifications:	CE, FCC, RoHS		

Telexper International Inc.

33235 Transit Avenue, Union City, CA 94587 USA / Phone: 1-510-477-9150 / Fax: 1-510-477-9634

3F.-3, No.2, Jian 8th Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.) / Phone: +886-2-6620-5898 / Fax: +886-2-6620-6909 / <http://www.telexper.com> / E-mail: sales-tw@telexper.com

Solution Diagram:

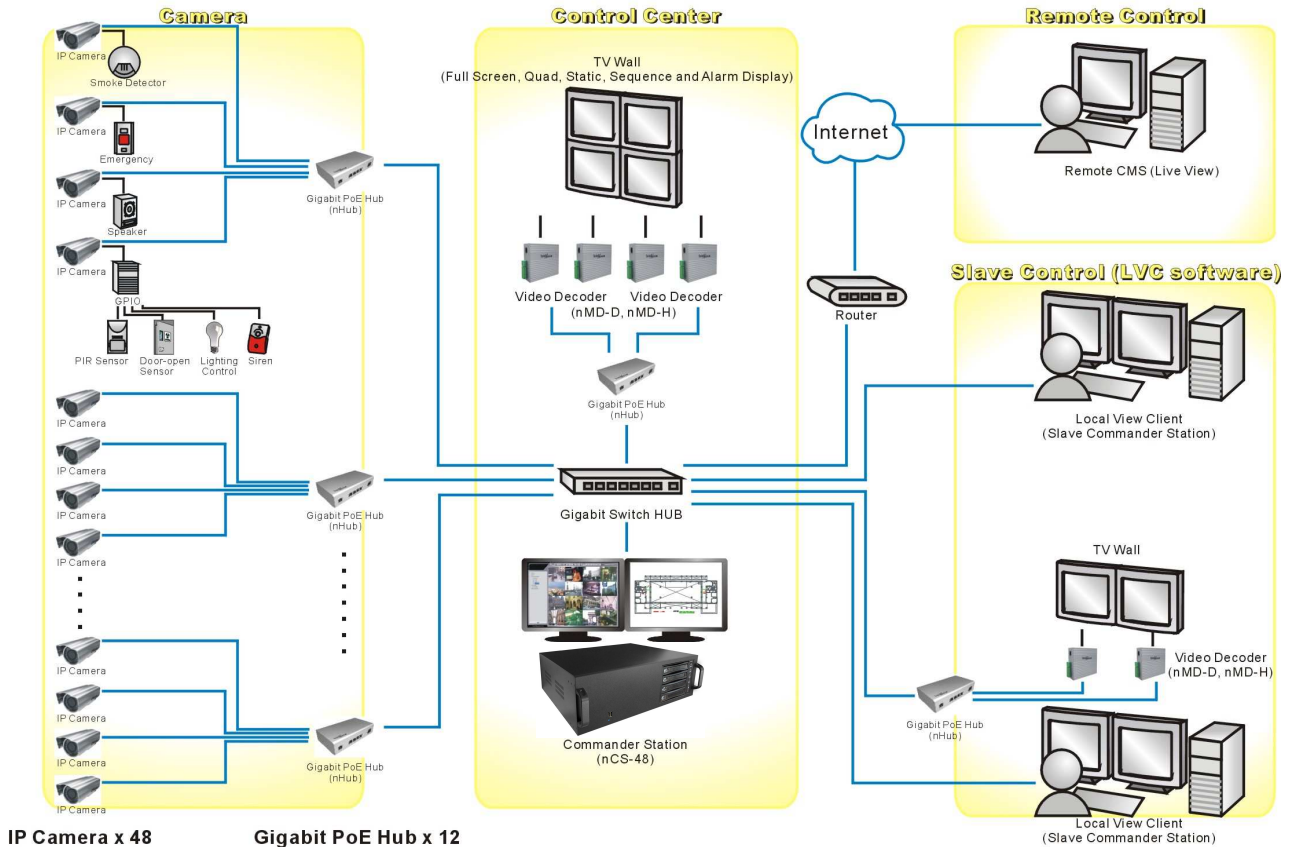

Applications:

- Financial Institution: Banks, postal offices, credit unions...etc.
- Public Construction: Highways, subways, power plants, reservoir...etc.
- Franchise: Convenient stores, malls, gas stations...etc.
- Convention centers, education institution, prisons, commercial buildings.

Full Software Functions:

Modular Design

- Multi Video/ Audio/ GPIO Integrated streaming design
 - IP Camera, PTZ cameras, Video Servers, Matrix Decoders
 - Manage all kinds of alarm sensors
 - Control electrical devices remotely (e.g. turn on/ off lighting)
 - Broadcast background music to the assigned areas
 - Live audio monitoring of selected area

Video

- Compatible with multi-codec, multi-brands IP products
 - M-JPEG, MPEG4, H.264 supported
- Multiple Steaming

Live & Recording

- Powerful Live Monitoring
 - Real-time video at 16ch display. Max. 64 screen display.
 - Group view
 - 1/4/9/10/13/16/25/36/64 cameras display on screen
- User-friendly system configuration of REC such as
 - Recording Schedule
 - Frame rate (fps) & quality (compression & bit rate) adjustment
 - Multi-channel of video & audio REC
 - Alarm trigger schedule, alarm turbo, pre & post alarm
 - Auto recycle recording files when storage is full

Telexper International Inc.

33235 Transit Avenue, Union City, CA 94587 USA / Phone: 1-510-477-9150 / Fax: 1-510-477-9634

3F.-3, No.2, Jian 8th Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.) / Phone: +886-2-6620-5898 / Fax: +886-2-6620-6909 / <http://www.telexper.com> / E-mail: sales-tw@telexper.com

- Intelligent search playback (built-in indexed database)
 - Date/Time search
 - Motion search (up to four adjustable detection zones)
 - Smart search: Missing Object, foreign object search
 - Alarm search
 - Card number search (with ATM/Access Control/POS integration function)

Remote Viewing

- Remote CMS supports live view and playback
- 3G Phone Remote Viewer (Windows OS/ iPhone/ Android/ Symbian OS)

Alarm

- Alarm Call Live Monitoring
 - Pre-recorded digital alert message per every device
- Instant Alarm Notification on E-Map
- User-friendly Alarm E-mail Notification

Advanced user management administration

- Multi-user, multi-authority, hidden camera & etc

Future Expansion

- Unlimited Cameras, Storage Systems Expansion

Storage & Archive

- USB2.0 for archive (JPEG, AVI, Wav & proprietary format)

More value-added functions (on request):

- ATM/ POS plug-in module
- Broadcast system
- Access control system
- Emergency Intercom System
- Multimedia Advertisement system

3rd Party IP Camera Compatibility

- Support Axis, Sony and other IP camera brands.

Other Components of Telexper IP System:

- Network Video Server (nVS series)
- Network Day & Night PoE Camera (nCAM series)
- Network Video Recorder (nVR series)
- Network Matrix Decoder (nMD series)
- Network Gigabit PoE HUB (nHub series)
- Network Alarm GPIO Expansion Module (nGPIO)

Specifications are subject to change without prior notice.