

Digital Signal Controller





Features:

- De-centralized & Modularized Design
- Less Maintenance Cost than Analogue System
- Multi Streaming Design

Other Componenets of Telexper IP System:

- Gigabit PoE Hub (nHub series)
- Network Hybrid DVR (nHybrid Sereis)
- Network Commander Station (nCS series)
- Network Matrix Decoder (nMD series)
- Network CMS software (nCMS series)
- Network Video Recorder (nVR series)
- Network Alarm GPIO Expansion Module (nGPIO)

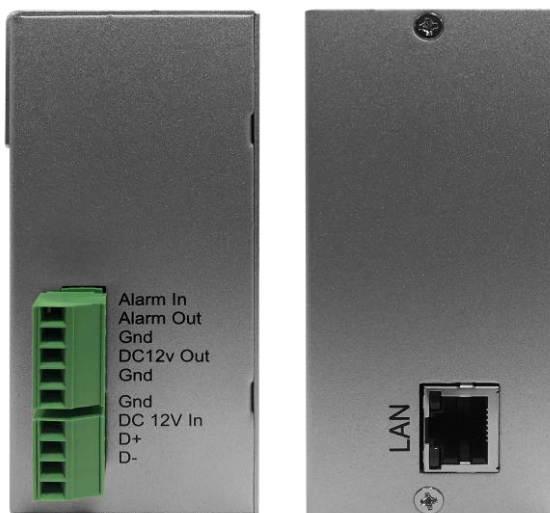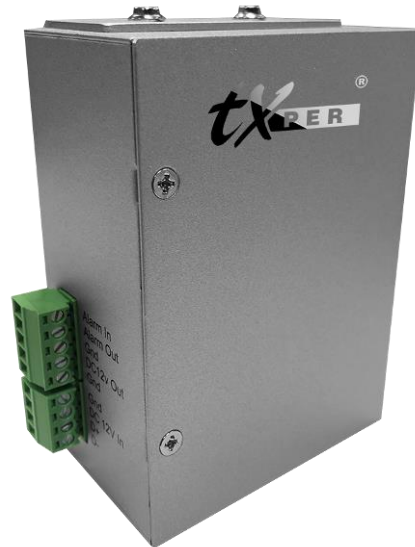

(Specifications subject to change without prior notice)

Model no

nVS-1DA Digital Signal Controller

Standard:

IEEE820.3i 10Base-T, 10Mbit/s
IEEE802.3u 100Base-T, 100Mbit/s
IEEE802.3af Power over Ethernet (PoE)

Interface:

RS485 x 1
Alarm Input/ Output x 1
Power to camera x 1
External Power Input x 1

Video & Audio:

Motion Detection built-in
Web Server built-in
Hardware Watchdog built-in

Power Requirement:

Built-in PoE Device Yes (IEEE802.3af)
Effective Distance 100M long (away from PoE HUB)
External Power Input DC 12V, 1A (min)
Power to Camera DC 12V, 8W (max)

Mechanical:

Enclosure Metal material
Installation Wall mount (Bracket supplied)
Dimension & Weight 71 x 44 x 97 mm, 300g

Environment:

Operating 0 to 50 °C, 10% to 80% R.H.
(non-condensing)
Storage (-)10 to (+) 70 °C, 5% to 95%
(non-condensing)

Approvals CE, FCC, RoHS

Telexper International Inc.

33235 Transit Avenue, Union City, CA 94587 USA / Phone: 1-510-477-9150 / Fax: 1-510-477-9634

3F.-3, No.2, Jian 8th Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.) / Phone: +886-2-6620-5898 / Fax: +886-2-6620-6909 / <http://www.telexper.com> / E-mail: sales-tw@telexper.com